



32" 2500 nit Professional High Brightness LCD

Model DS321LR4

The DS321LR4 is a 32 inch professional ultra high brightness LCD. With a brightness rating of 2,500 cd/m² this display features an LED back light for incredible, high contrast picture quality and low power consumption.

Key Features

- 2,500 nit Maximum Brightness
- LED Backlight
- D65 Color Calibrated
- 1,000,000:1 Dynamic Contrast Ratio
- Multiple Language Support
- 1920 x 1080 Native Resolution

Screen image simulated.

32" 2500 nit Professional High Brightness LCD

Model DS321LR4

PANEL

LCD Panel Type	31.5 inches TFT LCD
Native Resolution	1920 x 1080
Backlight	Direct LED
Brightness	2500 nit
Default Color Temperature	D65 (6500 K)
Contrast Ratio	10,000:1 (static), 1,000,000:1 (dyn)
Response Time	8 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
Panel Surface	AG Haze 11%, 3H

POWER

Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power On Mode	115 W (typ), 190 W (max)
Power Saving Mode	< 5 W

MECHANICAL SPECS

Bezel Width (T/B/L/R)	28.6 / 21.4 / 15 / 15
Cabinet Color	Black
Monitor Dimension (LxHxD, w/o stand)	732 x 447 x 96 mm
Monitor Weight (set/package)	15.2 kg / 18.2 kg
VESA Mounting (dimension)	200 x 200 mm
Orientation	Portrait / Landscape

USER INTERFACE

Language	English / French / Spanish
On/Off Scheduling	Yes
Ambient Light Sensor	Yes

I/O PORTS

DVI-D	In (x1): 640x480, 720x480, 800x600, 1024x768, 1280x720, 1280x768, 1360x768, 1920x1080
VGA	In (x1)
USB	In (x1)
RS-232	In (x1), Out (x1)
RJ-45	In (x1)

ACCESSORIES


Remote Control	Yes
Users Guide / Driver CD-ROM	Yes
Video Cable	DVI
Power Cable	Yes
RJ-45 Cable	Yes

ENVIRONMENT

Operating Temperature	0° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing

CERTIFICATION

CE / FCC / ROHS	
-----------------	--

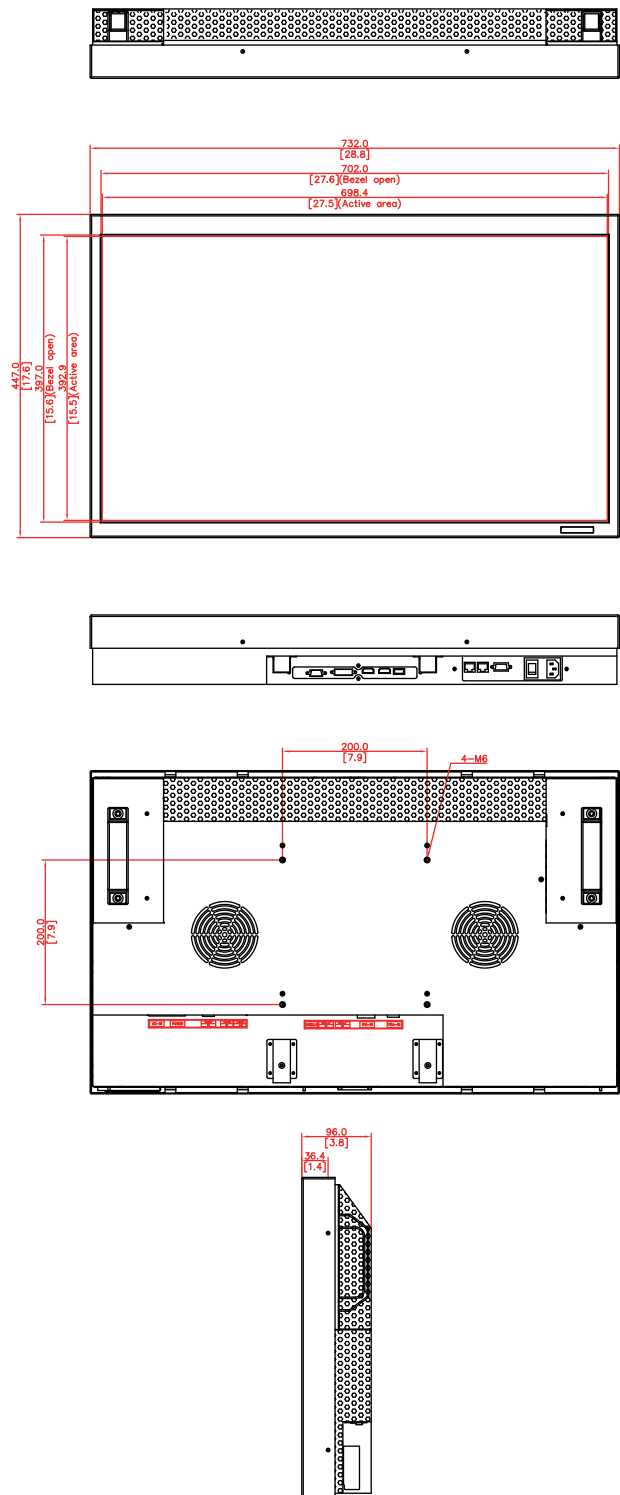

For More Information, Contact DynaScan:

Tel: +1 949-421-0348, +1 866-508-4848

Email: info@dynascanusa.com

Online: www.dynascanusa.com

All specifications subject to change without notice.